


04C 系列传动链轮

产品特点：产品内孔标准化，可直接用于现场安装。

04C系列

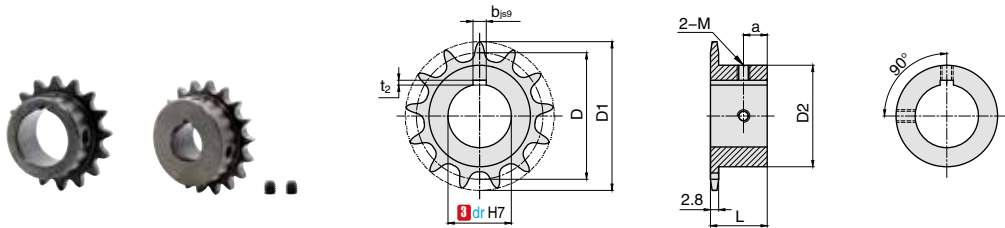

▲ 键槽中心对准齿尖中心

对应链条尺寸系列
04C

代号	材质	热处理	表面处理	附件
DSFA04CB	45#	齿部高频淬火 HRC30-40	无	紧定螺钉
DSFB04CB			发黑	
DSFC04CB	304	无	无	

订购编号示例

1 代号 - 2 齿数 - 3 dr

DSFB04CB - 17 - 12

1 代号	2 齿数	主要尺寸						重量 kg							
		3 孔径 dr	节径 D	外径 D1	凸台直径 D2	总长 L	a								
DSFA04CB DSFB04CB	16	10 12	32.55	36	25	15	6	0.06							
	17		34.56	38				0.07							
	18		36.57	40				0.07							
	19		38.58	42				0.08							
	20		40.59	44				0.08							
	21	42.61	46	0.09											
	22	44.62	48	30	0.1										
	23	46.63	50		0.11										
	24	48.65	52		0.12										
	25	50.66	54		0.14										
	26	52.68	56		0.14										
	DSFC04CB	28	12 15	56.71	60	40	20	8	0.15						
		30		60.75	64				0.16						
		32		64.78	68				0.20						
		34	12 15 16	68.82	72				35	15	6	0.21			
		35		70.84	74							0.21			
		36		72.86	76							0.22			
		38		76.90	80							0.26			
		40		80.93	84							0.27			
		16		10	32.55							36	21	16	6
17		34.56			38							23	0.07		
18		36.57			40							25	0.09		
19		38.58	42		26				0.1						
20	40.59	44	28		0.11										
DSFC04CB	22	10 12	42.61	46	30	18	7	0.12							
	23		44.62	48				0.14							
	24		46.63	50				0.15							
	25		48.65	52				0.16							
	26		50.66	54				0.16							
	28	12 15	56.71	60				8	0.15						
	30		60.75	64					0.16						
	32		64.78	68					0.2						

轴孔加工尺寸

轴孔直径 dr	键槽 b × t ₂	固定螺丝 M
10	3 × 1.4	M4
12	4 × 1.8	M5
15、16	5 × 2.3	M6
20	6 × 2.8	M6