


法兰型

产品特点: 结构简单, 内外径相差比例小, 适合小直径轮毂, 同轴度出色, 安装方便。

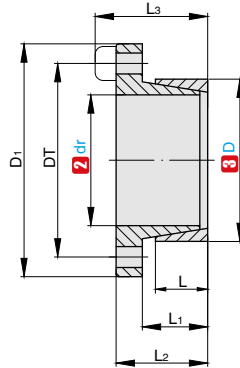

ESEF
法兰型

主体材质	表面处理
45#	光饰

▲ 若有特殊需求, 可提供 45# 无电解镀锌、SUS304 材质的同规格产品, 具体请与销售人员联系。

▲ 符合国标 JB/T 7934-1999 Z14 胀紧套标准

订购编号示例

1 代号 - 2 内径 dr × 3 外径 D
ESEF - 20 × 30

1 代号	主要尺寸								额定负荷		接触面压强		紧锁螺钉		螺钉锁紧扭矩 (N·m)			
	内径	外径	D ₁	DT	L	L ₁	L ₂	L ₃	轴向力 (KN)	扭矩 (N·m)	轴 (Mpa)	毂 (Mpa)	数量	规格				
	2 dr	3 D							F _t	M _t	Ps	Ph						
ESEF	14	25	42	33	16	20	26	30	9		64	109	61	M4	2.9			
	16										74	95						
	18										82	85						
	19										87	80						
	20										150	124						
	22	30	50	39							15			165	113	82		
	24													180	104			
	25													187	100			
	28													210	89			
	30													225	83			
	32	42	62	51							240	77	59					
	35										260	71						
	36										270	69						
	38										400	93						
	40										425	88						
	42	48	70	58							446	83	73	M6	10			
	45										875	115						
	48										935	107						
	50										974	103						
	55										1070	94						
60	62	89	74	20	25	35	43	38.9			1165	86	83	M8	25			
65											1265	79						
												71						

▲ 与胀紧套连接的轴和孔精度要求分别为 h8 和 H8