


本体有防松 · 钢销型

产品特点: M5~M30 牙部耐落防松处理, 不易脱落。

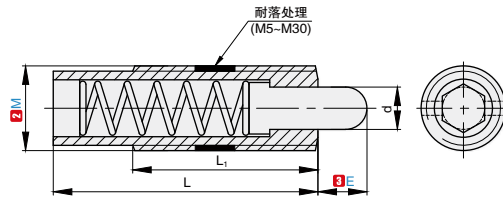

PTSRS
本体有防松 · 钢销型

订购编号示例: 1 代号 - 2 M - 3 E - 4 材料代码
PTSRS - M8 - 5 - M14

1 代号	2 M	3 E	螺距	L ₁		d	L		许用载荷 (N)						专用扳手		
				材料代码: M13·M14·M15	材料代码: M16		材料代码: M13·M14·M15	材料代码: M16	材料代码: M13 min.	材料代码: M13 max.	材料代码: M14 min.	材料代码: M14 max.	材料代码: M15 min.	材料代码: M15 max.		材料代码: M16 min.	材料代码: M16 max.
PTSRS	▲ M3	1.5	0.5	10	15	1.1	10	15	0.05	0.32	0.5	1	0.8	3	2	5	一字螺丝刀
	▲ M3	3		15	20		15	20	0.09	0.32	0.3	1	0.8	3	2	5	
	▲ M4	2	0.7	15	24	1.6	15	24	0.23	0.65	1	2	3	9	5	13	PSSN-1
	▲ M4	4		24	24		24	24	0.24	0.65	0.6	2	2	9	5	13	
	▲ M5	3	0.8	20	27	2	20	27	0.74	2.95	2	10	5	20	9	25	PSSN-1
	▲ M5	5		27	39		27	39	0.72	2.95	2	10	3	20	9	25	
	▲ M6	3	1	25	30	2.5	25	30	0.85	3.2	6	10	8	30	14	39	PSSN-1
	▲ M6	5		30	36		30	36	0.85	3.2	2	10	5	30	14	39	
	M6	10	1.25	30	-	3.1	39	-	-	-	1.4	10	5	28	-	-	PSSN-2
	▲ M8	3		25	27		25	27	0.9	3.3	6	10	15	30	15	41	
	▲ M8	5	1.5	27	30	3.8	27	35	0.9	3.3	3	10	8	30	15	41	PSSN-2
	M8	10		30	-		43	-	-	-	3	10	7	30	-	-	
	▲ M10	5	1.75	30	30	5.5	30	35	1.9	4.7	6	15	9	50	16	63	PSSN-3
	▲ M10	10		30	30		43	53	1.7	4.7	3	15	8	50	13	63	
	M10	15	2	30	-	8	58	-	-	-	3	15	6	50	-	-	PSSN-4
	▲ M12	5		30	35		30	43	1.5	4.7	6	15	19	50	37	98	
	▲ M12	10	2.5	35	35	10	43	58	1.3	5.9	3	20	8	50	15	98	PSSN-5
	▲ M12	15		35	35		51	78	1.6	5.9	3	20	5	50	15	98	
	M12	20	3	35	-	14	78	-	-	-	3.5	20	7	50	-	-	PSSN-5
	▲ M16	10		35	35		60	60	1.7	12.8	6	40	13	80	24	147	
	▲ M16	15	3.5	35	35	14	60	70	1.7	12.8	4	40	13	80	22	147	PSSN-6
	▲ M16	20		35	35		85	90	1.7	12.8	5	40	10	80	13	147	
	★ M16	30	3.5	35	35	14	125	125	-	-	3	40	7	80	20	147	PSSN-4
	M16	40		35	-		125	-	-	-	5	40	7	80	-	-	
	M16	50	2.5	35	-	10	155	-	-	-	20	50	30	80	-	-	PSSN-5
	M16	60		35	-		159	-	-	-	3	50	4	80	-	-	
	M16	70	3	35	-	10	185	-	-	-	3.5	50	5.6	80	-	-	PSSN-5
	M16	80		35	-		185	-	-	-	20	50	30	95	-	-	
	M20	15	3	45	-	10	60	-	-	-	13	80	25	150	-	-	PSSN-5
	M20	20		45	-		72	-	-	-	12	80	23	150	-	-	
M20	30	3	45	-	10	96	-	-	-	12	80	23	150	-	-	PSSN-5	
M20	40		45	-		120	-	-	-	12	80	23	150	-	-		
M24	7	3	45	-	10	60	-	-	-	20	98	44	196	-	-	PSSN-5	
M24	15		45	-		60	-	-	-	20	98	47	216	-	-		
M24	20	3	45	-	10	75	-	-	-	18	98	44	216	-	-	PSSN-5	
M24	30		45	-		100	-	-	-	18	98	44	216	-	-		
M24	40	3.5	45	-	14	124	-	-	-	18	98	44	216	-	-	PSSN-6	
M30	15		45	-		66	-	-	-	28	118	44	275	-	-		
M30	20	3.5	45	-	14	78	-	-	-	28	118	53	275	-	-	PSSN-6	
M30	30		45	-		100	-	-	-	28	118	45	275	-	-		
M30	40	3.5	45	-	14	123	-	-	-	28	118	47	275	-	-	PSSN-6	

▲ 仅带▲规格的产品有 M13 材质, 仅带★规格的产品有 M16 材质。

▲ 专用扳手一栏的详细信息请参阅“弹簧柱塞用扳手”产品页。

▲ min. 表示弹簧柱塞接触时, 销尚未压缩时的力量。

▲ max. 表示弹簧柱塞的销压缩到终点的力量。

▲ 1N=0.101972kgf。

代号	类型	4 材料代码	主体		销		弹簧	螺丝	
			材质	处理	材质	颜色			硬度
PTSRS	本体有防松 · 钢销型	M13	45#	染黑	45#	银	36~45HRC	65Mn	绿 (底部)
		M14		染黑					银
		M15		染黑					黑
		M16		镀镍					黑