


## 标准型

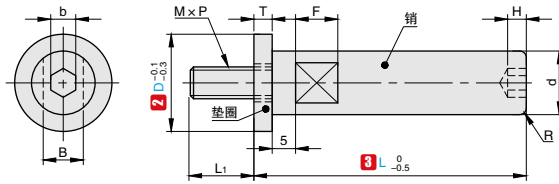

注: T尺寸因L尺寸而异

DSP  
标准型

订购编号示例

1 代号 - 2 D - 3 L  
DSP - 10 - 20

1 代号	2 D	3 L 指定单位5mm	M×P	L <sub>1</sub>	b	H	B	F	R	T	d	适用矩形弹簧 DSJP~			
												E	L	ML·M·MH·H·PG·PZ·PV	S
DSP	7	20-50	4×0.7	7	3	3	4	8	1	3	6	14	14	14	-
	8											16	16	16	-
	9											-	18	18	18
	10	20-75	5×0.8	8	4	3	6	8	1.5	4	8	18	-	20	22
	11											-	20·22	22	25
	12.5											20	-	25	27
	13.5	20-85	6×1.0	10	5	4	8	8	2	5	10	22	25·27	27	30
	15											25	-	30	-
	16											27	30	-	-
	17.5	20-125	8×1.25	17 (12)	6	4	11	10	2.5	5 (10)	13	-	-	35	35
	19											-	-	-	-
	20											-	35	-	-
	22	30-185	10×1.5	20 (15)	8	5	14	12	3	5 (10)	16	30	-	40	40
	25											-	40	-	-
	27.5											-	-	50	-
	30	30-215	12×1.75	23 (18)	10	6	17	14	3	5 (10)	20	-	-	60	-
33	-											-	60	-	
	-											60	-	-	


▲ D尺寸7-12.5的L尺寸20、D尺寸13.5-16的L尺寸20-25、D尺寸17.5-27.5的L尺寸30-35未进行扳手槽加工。

▲ D尺寸13.5-33的L尺寸为5mm(L=25、35、45……)时，T及L<sub>1</sub>的尺寸为( )内的尺寸。

▲ 适用的矩形螺旋弹簧为外径尺寸。


代号	类型	材质	表面处理	硬度
DSP	标准型	45#	四氧化三铁保护膜	20-25HRC

## 锥型·直柱型

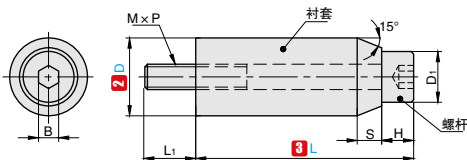

DSPC  
锥型

带▲号的产品为支柱型

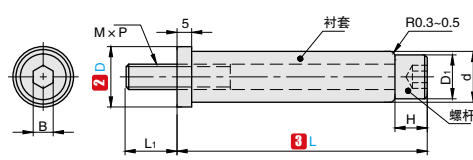

DSPR  
直柱型

订购编号示例

1 代号 - 2 D - 3 L  
DSPC - 10 - 40

代号	类型	材质	
		衬套	螺杆
DSPC DSPR	锥型 直柱型	AISI1215	35CrMo

## 锥型 · 直柱型

1 代号	2 D	3 L	d	D <sub>1</sub>	B	M×P	H	S	L <sub>1</sub>	适用矩形螺旋弹簧 DSJP~								
										E	L	ML·M·MH·H·PG·PZ·PV	S					
DSPC DSPR	6	18	-	4.5	2	M2.5×P0.45	2.5	2	9.5	12	12·14	14	-					
		23																
		28																
	8	20	-	5.5	2.5	M3×P0.5	3	3	8	14	16·18	16·18	20·22					
		30																
		40																
	10	50	-	7	3	M4×P0.7	4	4	9	18	20·22	20·22	25					
		20																
		30																
		40																
	12	60	-	8.5	4	M5×P0.8	5	4	10	22	25·27	27	-					
		20																
		30																
		40																
	14	50	-	10	4	M6×P1.0	4	4	12	-	30	30	-					
		12																
		20			5		6		4					11	-	30	30	-
		30																
		40																
	16	60	-	13	6	M8×P1.25	8	5	15	27	35	35	35					
		30																
		80							13					-	-	-	-	-
		28																
	19	40	-	16	8	M10×P1.5	10	5	17	30	-	40	40					
		60																
		80						-	20					-	-	-		
		100 ▲																
	20	23	-	17	-	-	10	5	17	-	40	-	-					
		40																
		60						-	20					-	-			
		80																
	23	100 ▲	-	20	-	-	12	8	22	-	-	50	-					
		30																
		40						-	-					-	-			
		60																
		80																
	26	120 ▲	-	21	-	-	12	8	24	-	50	-	-					
		28																
		60						-	22					-	-			
		80																
	28	100 ▲	-	23	18	10	M12×P1.75	12	12	-	-	60	-					
		30																
		40						-	-					-	-			
		60																
		80																
	31	120 ▲	-	25	-	-	12	12	22	-	60	-	-					
		28																
		40						-	-					-	-			
60																		
36	80	-	30	-	-	12	15	22	-	70	70	-						
	40																	
	60						-	-					-	-				
	100 ▲																	
120 ▲																		

▲ 适用的矩形螺旋弹簧为外径尺寸。

▲ 带▲号的产品为直柱型 (DSPR)，且仅为直柱型 (DSPR)

弹  
簧