


中压缩量型

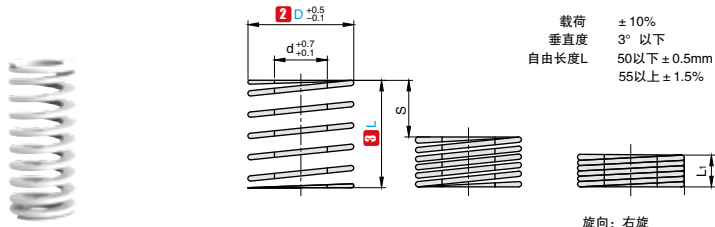

DSJPHC
中压缩量型

订购编号示例

1 代号 - **2**D - **3**L
DSJPHC - 10.5 - 60

1 代号	2 D	3 L	d	刚度系数 N/mm (kgf/mm)	压紧长度 L ₁ (mm)	S=L×50%	
						S (mm)	载荷 N (kgf)
DSJPHC	10.5	6	78.5 (8.0)	15	10.46 (1.07)	6	7.5
				20	7.84 (0.80)	8	10
				25	6.27 (0.64)	10	12.5
				30	5.19 (0.53)	12	15
				35	4.50 (0.46)	14	17.5
				40	3.92 (0.40)	16	20
				45	3.53 (0.36)	18	22.5
				50	3.14 (0.32)	20	25
				55	2.84 (0.29)	22	27.5
				60	2.65 (0.27)	24	30
				65	2.45 (0.25)	26	32.5
				70	2.25 (0.23)	28	35
	75	2.06 (0.21)	30	37.5			
	80	1.96 (0.20)	32	40			
	12.5	7	88.3 (9.0)	15	11.77 (1.20)	6	7.5
				20	8.82 (0.90)	8	10
				25	7.06 (0.72)	10	12.5
				30	5.88 (0.60)	12	15
				35	5.04 (0.514)	14	17.5
				40	4.41 (0.45)	16	20
				45	3.92 (0.40)	18	22.5
				50	3.53 (0.36)	20	25
				55	3.20 (0.327)	22	27.5
				60	2.94 (0.30)	24	30
65				2.71 (0.277)	26	32.5	
70				2.52 (0.257)	28	35	
75	2.35 (0.24)	30	37.5				
80	2.21 (0.225)	32	40				
90	1.96 (0.20)	36	45				
100	1.77 (0.18)	40	50				
14.5	8.5	127.5 (13.0)	15	17.00 (1.73)	6	7.5	
			20	12.70 (1.30)	8	10	
			25	10.19 (1.04)	10	12.5	
			30	8.53 (0.87)	12	15	
			35	7.25 (0.74)	14	17.5	
			40	6.37 (0.65)	16	20	
			45	5.68 (0.58)	18	22.5	
			50	5.09 (0.52)	20	25	
			55	4.60 (0.47)	22	27.5	
			60	4.21 (0.43)	24	30	
			65	3.92 (0.40)	26	32.5	
			70	3.62 (0.37)	28	35	
			75	3.43 (0.35)	30	37.5	
			80	3.23 (0.33)	32	40	
			90	2.84 (0.29)	36	45	
			100	2.54 (0.26)	40	50	
			125	2.05 (0.21)	50	62.5	
			150	1.70 (0.17)	60	75	

1 代号	2 D	3 L	d	刚度系数 N/mm (kgf/mm)	压紧长度 L ₁ (mm)	S=L×50%	
						S (mm)	载荷 N (kgf)
DSJPHC	17	10.5	196.1 (20.0)	20	19.61 (2.00)	8	10
				25	15.69 (1.60)	10	12.5
				30	13.04 (1.33)	12	15
				35	11.17 (1.14)	14	17.5
				40	9.80 (1.00)	16	20
				45	8.72 (0.89)	18	22.5
				50	7.84 (0.80)	20	25
				55	7.15 (0.73)	22	27.5
				60	6.57 (0.67)	24	30
				65	6.08 (0.62)	26	32.5
				70	5.58 (0.57)	28	35
				75	5.19 (0.53)	30	37.5
	80	4.90 (0.50)	32	40			
	90	4.31 (0.44)	36	45			
	100	3.92 (0.40)	40	50			
	125	3.13 (0.32)	50	62.5			
	150	2.64 (0.27)	60	75			
	175	2.24 (0.23)	70	87.5			
	21	13.5	294.2 (30.0)	25	23.54 (2.40)	10	12.5
				30	19.61 (2.00)	12	15
				35	16.76 (1.71)	14	17.5
				40	14.70 (1.50)	16	20
				45	13.04 (1.33)	18	22.5
				50	11.76 (1.20)	20	25
55				10.68 (1.09)	22	27.5	
60				9.80 (1.00)	24	30	
65				9.02 (0.92)	26	32.5	
70				8.43 (0.86)	28	35	
75				7.84 (0.80)	30	37.5	
80				7.35 (0.75)	32	40	
90	6.57 (0.67)	36	45				
100	5.88 (0.60)	40	50				
110	5.39 (0.55)	44	55				
120	4.90 (0.50)	48	60				
125	4.70 (0.48)	50	62.5				
130	4.51 (0.46)	52	65				
140	4.21 (0.43)	56	70				
150	3.92 (0.40)	60	75				
175	3.36 (0.34)	70	87.5				
200	2.94 (0.30)	80	100				

中压缩量型

1 代号	2 D	3 L	d	刚度系数 N/mm (kgf/mm)	压紧长度 L ₁ (mm)	S=L×50%	
						S (mm)	载荷 N (kgf)
DSJPHC	26	16.5	392.3 (40.0)	25	31.38 (3.20)	10	12.5
				30	26.18 (2.67)	12	15
				35	22.45 (2.29)	14	17.5
				40	19.61 (2.00)	16	20
				45	17.45 (1.78)	18	22.5
				50	15.69 (1.60)	20	25
				55	14.21 (1.45)	22	27.5
				60	13.04 (1.33)	24	30
				65	12.06 (1.23)	26	32.5
				70	11.17 (1.14)	28	35
				75	10.49 (1.07)	30	37.5
				80	9.80 (1.00)	32	40
				90	8.72 (0.89)	36	45
				100	7.84 (0.80)	40	50
				110	7.15 (0.73)	44	55
				120	6.57 (0.67)	48	60
				125	6.27 (0.64)	50	62.5
				130	6.08 (0.62)	52	65
				140	5.58 (0.57)	56	70
				150	5.19 (0.53)	60	75
				175	4.51 (0.46)	70	87.5
				200	3.92 (0.40)	80	100
				225	3.49 (0.36)	90	112.5
				250	3.14 (0.32)	100	125
				DSJPHC	31	21	490.3 (50.0)
40	24.51 (2.50)	16	20				
45	21.77 (2.22)	18	22.5				
50	19.61 (2.00)	20	25				
55	17.83 (1.82)	22	27.5				
60	16.37 (1.67)	24	30				
65	15.09 (1.54)	26	32.5				
70	14.02 (1.43)	28	35				
75	13.08 (1.33)	30	37.5				
80	12.25 (1.25)	32	40				
90	10.88 (1.11)	36	45				
100	9.80 (1.00)	40	50				
110	8.92 (0.91)	44	55				
120	8.13 (0.83)	48	60				
125	7.84 (0.80)	50	62.5				
130	7.55 (0.77)	52	65				
140	6.96 (0.71)	56	70				
150	6.57 (0.67)	60	75				
160	6.17 (0.63)	64	80				
170	5.78 (0.59)	68	85				
175	5.58 (0.57)	70	87.5				
180	5.49 (0.56)	72	90				
190	5.19 (0.53)	76	95				
200	4.90 (0.50)	80	100				
250	3.92 (0.40)	100	125				
300	3.23 (0.33)	120	150				
DSJPHC	37	26	588.4 (60.0)	35	33.62 (3.43)	14	17.5
				40	29.41 (3.00)	16	20
				45	26.18 (2.67)	18	22.5
				50	23.53 (2.40)	20	25
				55	21.40 (2.18)	22	27.5
				60	19.61 (2.00)	24	30
				65	18.10 (1.85)	26	32.5
				70	16.76 (1.71)	28	35
				75	15.69 (1.60)	30	37.5
				80	14.70 (1.50)	32	40
				90	13.04 (1.33)	36	45
				100	11.76 (1.20)	40	50
				110	10.68 (1.09)	44	55
				120	9.80 (1.00)	48	60
				125	9.41 (0.96)	50	62.5
				130	9.02 (0.92)	52	65
				140	8.43 (0.86)	56	70
				150	7.84 (0.80)	60	75
				160	7.35 (0.75)	64	80
				170	6.96 (0.71)	68	85
				175	6.76 (0.69)	70	87.5
				180	6.57 (0.67)	72	90
				190	6.17 (0.63)	76	95
				200	5.88 (0.60)	80	100

1 代号	2 D	3 L	d	刚度系数 N/mm (kgf/mm)	压紧长度 L ₁ (mm)	S=L×50%					
						S (mm)	载荷 N (kgf)				
DSJPHC	43	31	833.6 (85.0)	37	4.70 (0.48)	100	125				
				250	3.92 (0.40)	120	150				
				300	3.34 (0.34)	20	25				
				50	27.79 (2.83)	24	30				
				60	23.82 (2.43)	28	35				
				70	20.84 (2.13)	32	40				
				80	18.52 (1.89)	36	45				
				90	16.67 (1.70)	40	50				
				100	15.16 (1.55)	44	55				
				110	13.89 (1.42)	48	60				
				120	12.82 (1.31)	52	65				
				130	11.91 (1.21)	56	70				
				140	11.11 (1.13)	60	75				
				150	10.42 (1.06)	64	80				
				160	9.81 (1.00)	68	85				
				170	9.26 (0.94)	72	90				
				180	8.77 (0.89)	76	95				
				190	8.34 (0.85)	80	100				
				200	7.41 (0.76)	90	112.5				
				225	6.67 (0.68)	100	125				
				250	6.06 (0.62)	110	137.5				
				275	5.56 (0.57)	120	150				
				300	5.56 (0.57)	120	150				
				DSJPHC	46	33	1079 (110)	50	43.14 (4.40)	20	25
								60	35.99 (3.67)	24	30
70	30.79 (3.14)	28	35								
80	26.96 (2.75)	32	40								
90	23.92 (2.44)	36	45								
100	21.57 (2.20)	40	50								
110	19.61 (2.00)	44	55								
120	17.94 (1.83)	48	60								
125	17.25 (1.76)	50	62.5								
130	15.57 (1.69)	52	65								
140	15.39 (1.57)	56	70								
150	14.41 (1.47)	60	75								
175	12.35 (1.26)	70	87.5								
200	10.78 (1.10)	80	100								
225	9.61 (0.98)	90	112.5								
250	8.62 (0.88)	100	125								
275	7.84 (0.80)	110	137.5								
300	7.15 (0.73)	120	150								
DSJPHC	50	36	1324 (135)					50	52.96 (5.40)	20	25
								60	44.13 (4.50)	24	30
								70	37.83 (3.86)	28	35
								80	33.10 (3.38)	32	40
								90	29.42 (3.00)	36	45
								100	26.48 (2.70)	40	50
								110	24.07 (2.45)	44	55
				120	22.06 (2.25)	48	60				
				130	20.37 (2.08)	52	65				
				140	18.91 (1.93)	56	70				
				150	17.65 (1.80)	60	75				
				175	15.13 (1.54)	70	87.5				
				200	13.24 (1.35)	80	100				
				225	11.77 (1.20)	90	112.5				
				250	10.59 (1.08)	100	125				
				275	9.63 (0.98)	110	137.5				
				300	8.83 (0.90)	120	150				
				350	7.57 (0.77)	140	175				
				400	6.62 (0.68)	160	200				

■ 载荷的计算方法

载荷 = 刚度系数 × 压缩量

(国际单位) $N = N/mm \times Smm$
 $kgf = kgf/mm \times Smm$
 $(kgf = N \times 0.101972)$

▲ 压紧长度为参考值, 且因生产批次不同会稍有偏差。

▲ 使用次数: 100 万次 (L×55% 为 30 万次)

代号	类型	材质
DSJPHC	中压缩量型	SWOSC-V 相当