


双盖型

产品特点: 可用于需要高载荷、高转速、高旋转精度的场合。

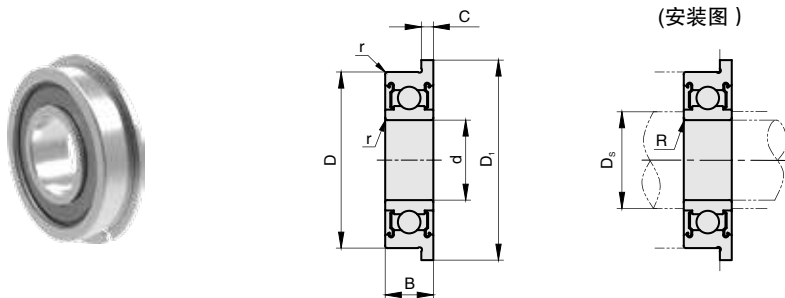

订购编号示例

1 代号

RSF6700-2Z

1 代号	d	D	B	D ₁	C	r(min.)	基本额定负载		许用转速 rpm (参考)	安装尺寸		重量 g (参考)
							Cr(动)KN	Cor(静)KN		D _s (min.)	R (max.)	
RSF68/2-2Z	2	5	2.3	6.1	0.6	0.08	169	50	85000	2.7	0.08	0.22
RSF69/2-2Z		6	3	7.5	0.8	0.15	330	98	75000	3	0.15	0.48
RSF68/2.5-2Z	2.5	6	2.6	7.1	0.8	0.15	208	74	71000	3.7	0.08	0.36
RSF69/2.5-2Z		7	3.5	8.5	0.9	0.15	385	127	63000	3.85	0.15	0.68
RSF67/3-2Z	3	6	2.5	7.2	0.6	0.1	208	74	71000	3.6	0.08	0.33
RSF68/3-2Z		7	3	8.1	0.8	0.1	390	130	63000	3.9	0.1	0.53
RSF69/3-2Z		8	4	9.5	0.9	0.15	560	179	60000	4.2	0.15	0.97
RSF603-2Z		9	5	10.5	1	0.15	570	187	56000	4.2	0.15	1.63
RSF623-2Z	4	10	4	11.5	1	0.15	630	218	50000	4.2	0.15	1.86
RSF67/4-2Z		7	2.5	8.2	0.6	0.1	222	88	60000	4.6	0.08	0.35
RSF68/4-2Z		9	4	10.3	1	0.1	640	224	53000	5	0.1	1.14
RSF69/4-2Z		11	4	12.5	1	0.15	715	276	48000	5.2	0.15	1.96
RSF604-2Z	5	12	4	13.5	1	0.2	957	345	48000	5.6	0.2	2.53
RSF624-2Z		13	5	15	1	0.2	1300	485	40000	5.6	0.2	3.53
RSF67/5-2Z		8	2.5	9.2	0.6	0.1	217	91	53000	5.6	0.08	0.41
RSF68/5-2Z		11	5	12.5	1	0.15	715	281	45000	6.2	0.15	2.18
RSF69/5-2Z	6	13	4	15	1	0.2	1080	430	43000	6.6	0.2	2.84
RSF605-2Z		14	5	16	1	0.2	1330	505	40000	6.6	0.2	3.85
RSF625-2Z		16	5	18	1	0.3	1729	670	36000	7.7	0.3	5.3
RSF67/6-2Z		10	3	11.2	0.6	0.1	465	196	45000	6.6	0.1	0.77
RSF68/6-2Z	8	13	5	15	1.1	0.15	1080	440	40000	7	0.15	3.04
RSF69/6-2Z		15	5	17	1.2	0.2	1350	530	40000	7.6	0.2	4.26
RSF606-2Z		17	6	19	1.2	0.3	2190	835	38000	8	0.3	6.61
RSF626-2Z		19	6	22	1.5	0.3	2336	885	32000	8	0.3	9.09
RSF67/8-2Z	10	12	3.5	13.6	0.8	0.1	515	252	40000	8.8	0.1	1.15
RSF68/8-2Z		16	5	18	1.1	0.2	1610	710	36000	9.6	0.2	4.47
RSF69/8-2Z		19	6	22	1.5	0.3	1990	865	36000	10	0.3	8.3
RSF608-2Z		22	7	25	1.5	0.3	3350	1400	34000	10	0.3	13
RSF6700-2Z	12	15	4	16.5	0.8	0.15	855	435	15000	10.3	0.15	2.1
RSF6800-2Z		19	5	21	1	0.3	1716	840	37000	12	0.3	6.1
RSF6900-2Z		22	6	25	1.5	0.3	2695	1273	34000	13.2	0.3	11.1
RSF6701-2Z		18	4	19.5	0.8	0.2	926	530	13000	12.4	0.2	3.4
RSF6801-2Z	15	21	5	23	1.1	0.3	1915	1041	33000	14	0.3	7.1
RSF6901-2Z		24	6	26.5	1.5	0.3	2886	1466	31000	14	0.3	13.2
RSF6702-2Z		21	4	22.5	0.8	0.2	937	582	11000	15.4	0.2	3.9
RSF6802-2Z		24	5	26	1.1	0.3	2073	1253	28000	17	0.3	8.3
RSF6902-2Z	17	28	7	30.5	1.5	0.3	4321	2259	26000	17	0.3	19.9
RSF6703-2Z		23	4	24.5	0.8	0.2	1000	658	9500	17.4	0.2	4.4
RSF6803-2Z		26	5	28	1.1	0.3	2233	1456	26000	19	0.3	8.9
RSF6903-2Z		30	7	32.5	1.5	0.3	4588	2565	23000	19	0.3	21.4
RSF6704-2Z	20	27	4	28.5	0.8	0.2	1041	729	8500	20.4	0.2	6.3
RSF6804-2Z		32	7	35	1.5	0.3	4015	2462	21000	22	0.3	19.8
RSF6904-2Z		37	9	40	2	0.3	6381	3682	19000	22	0.3	42.8
RSF6805-2Z		25	37	7	40	1.5	0.3	4303	2932	18000	27	0.3
RSF6905-2Z	42		9	45	2	0.3	7001	4540	16000	27	0.3	50.2

材料说明

代号	类型	材质
RSF6 □ -2Z	双盖型	GCr15