

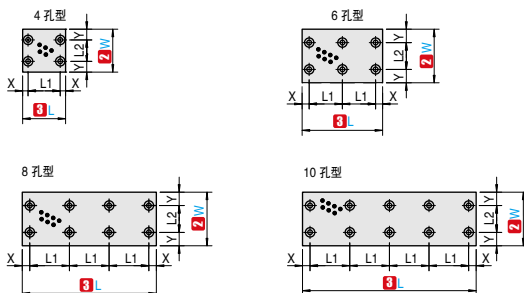
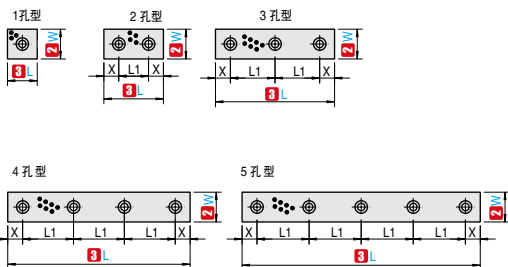


## 铜合金两面研磨型

产品特点: 为自润滑型产品, 可减少涂抹的润滑脂量。

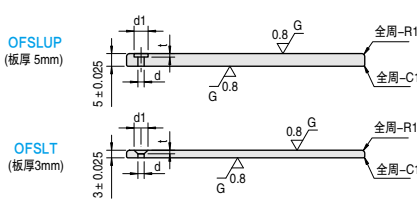

代号	类型	线性滑板厚度	材质
OFSL	两面研磨型	短头螺栓孔型	高力黄铜 + 固体润滑剂
OFSLUP		5mm	
OFSLU		5mm	
OFSLT		平头螺栓孔型	

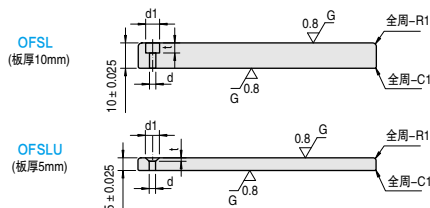

订购编号示例

1 代号 - 2 W - 3 L  
OFSL - 30 - 100


1 代号	2 W	3 L	安装孔数	孔位置	X	L1	Y	L2		
短头螺栓孔型 OFSL (板厚 10mm) OFSLUP (板厚 5mm) 平头螺栓孔型 OFSLU (板厚 5mm) OFSLT (板厚 3mm)	20	(30)	1	1 列	-	-	-	-		
		(40)	2		10	20	-	-		
		(50)	2		10	30	-	-		
		(60)	2		10	40	-	-		
		80	2		10	60	-	-		
		100	3		10	40	-	-		
		120	3		10	50	-	-		
		150	3		10	65	-	-		
		200	4		10	60	-	-		
		250	5		13	56	-	-		
		300	5		14	68	-	-		
		(30)	1		-	-	-	-	-	-
		(40)	2		10	20	-	-		
		(50)	2		10	30	-	-		
		(60)	2		10	40	-	-		
	80	2	10		60	-	-			
	100	3	10		40	-	-			
	120	3	10		50	-	-			
	150	3	10		65	-	-			
	200	4	10		60	-	-			
	250	5	13		56	-	-			
	300	5	14		68	-	-			
	(40)	1	-		-	-	-	-	-	
	(60)	2	10		40	-	-			
	80	2	10		60	-	-			
	100	3	12		38	-	-			
	120	3	12		48	-	-			
	150	3	12		63	-	-			
	200	4	13		58	-	-			
	250	5	13		56	-	-			
300	5	14	68	-	-					

## 铜合金两面研磨型

1 代号	2 W	3 L	安装孔数	孔位置	X	L1	Y	L2
短头螺栓孔型 OFSL (板厚 10mm) OFSLUP (板厚 5mm) 平头螺栓孔型 OFSLU (板厚 5mm) OFSLT (板厚 3mm)	50	50	1	1 列	-	-	-	-
		60	2		10	40	-	-
		80	2		10	60	-	-
		100	3		13	37	-	-
		120	3		13	47	-	-
		150	3		13	62	-	-
		200	4		13	58	-	-
		250	5		13	56	-	-
		300	5		14	68	-	-
	60	60	2	1 列	10	40	-	-
		80	2		10	60	-	-
		100	3		13	37	-	-
		120	3		13	47	-	-
		150	3		13	62	-	-
		200	4		13	58	-	-
		250	5		13	56	-	-
		300	5		14	68	-	-
		80	80		4	2 列	10	60
	100		4	13	74		20	40
	120		6	13	47		20	40
	150		6	13	62		20	40
	200		6	13	87		20	40
	250		8	14	74		20	40
	300		10	14	68		20	40
	100	100	4	2 列	13	74	25	50
		120	6		13	47	25	50
		150	6		13	62	25	50
		200	6		13	87	25	50
		250	8		14	74	25	50
		300	8		15	68	25	50


▲ OFSLUP 仅适用 W 尺寸 20 的规格; OFSLT 仅适用 L ( ) 的规格

### OFSL




W	d	d1	t	附属螺栓规格
20	4.5	8	4	M4×20
30	5.5	9.5	5	M5×20
40	6.5	11	6	M6×20
50	9	15	6	M8×20
60				
80				
100				

### OFSLUP




W	d	d1	t	附属螺栓规格
20	4.5	8	3	M4×20

### OFSLU



W	d	d1	t	附属螺栓规格
20	4.5	9.5	2.5	M4×20
30	5.5	11.1	2.8	M5×20
40	6.5	13.1	3.3	M6×20
50	9	17.6	4.3	M8×20
60				
80				
100				

### OFSLT



W	d	d1	t	附属螺栓规格
20	4.5	9.5	2.5	M4×20
30	5.5	11.1	2.8	M5×20
40				