



内径 G6 外径 p6/ 内径 G6 外径 m6

产品特点：有很高的强度、硬度，良好的耐磨性、耐腐蚀性。产品广泛运用与注塑机、连铸机、矿山机械、船舶、汽轮机。

代号	类型	材质	内径公差	外径公差	硬度 HB	使用温度范围 (°C)
OFBAD	直柱型	高力黄铜 (SP2)	G6	p6	≥ 210	-50~150
OFBADM				m6		

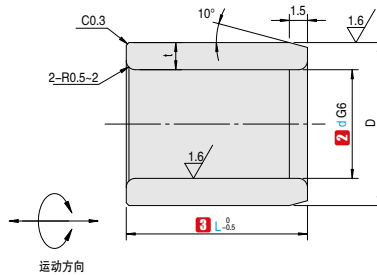

△ 配套轴公差推荐 (仅供参考):
d8: 一般用 (重载); e7: 一般用 (轻载);
f8: 高精度用; g6: 高精度用 (间隙负载)。

订购编号示例

1 代号 - **2** d - **3** L
OFBAD - 10 - 25

1 代号	2 dG6		Dp6		3 L										t		
OFBAD	5	+0.012 +0.004	10	+0.024 +0.015	5	6	8	10	12	15						2.5	
	6		10		5	6	8	10	12	15	16	20				2	
	8	+0.014 +0.005	12	+0.029 +0.018	5	6	8	10	12	15	16	20	25				
	10		15		6	8	10	12	15	16	20	25	30			2.5	
	12	+0.017 +0.006	18	+0.035 +0.022			8	10	12	15	16	20	25	30			3
	13		22				10	12	15	16	20	25	30	35			4.5
	15		25				12	15	16	20	25	30	35				
	16		26				12	15	16	20	25	30	35			5	
	20	+0.020 +0.007	30				12	15	16	20	25	30	35	40			
25		35	+0.042 +0.026			15	16	20	25	30	35	40					

1 代号	2 dG6		Dm6		3 L										t		
OFBADM	5	+0.012 +0.004	10	+0.015 +0.006	5	6	8	10	12	15						2.5	
	6		10		5	6	8	10	12	15	16	20				2	
	8	+0.014 +0.005	12	+0.018 +0.007	5	6	8	10	12	15	16	20	25				
	10		15		6	8	10	12	15	16	20	25	30			2.5	
	12	+0.017 +0.006	18	+0.021 +0.008			8	10	12	15	16	20	25	30			3
	13		22				10	12	15	16	20	25	30	35			4.5
	15		25				12	15	16	20	25	30	35				
	16		26				12	15	16	20	25	30	35			5	
	20	+0.020 +0.007	30				12	15	16	20	25	30	35	40			
25		35	+0.025 +0.009			15	16	20	25	30	35	40					