


两端双轴承型

产品特点：轮两侧各有一个轴承。

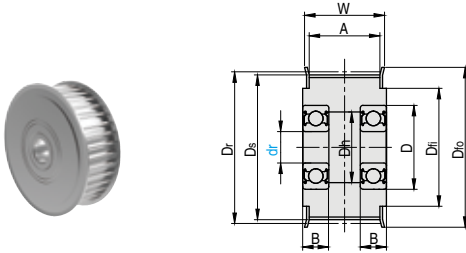

STS5MD
STH5MD
两端双轴承型

代号	类型	材质			表面处理
		主体	挡片	轴承	
STS5MD STH5MD	两端双轴承型	铝合金	铝合金	钢	本色阳极氧化处理

订购编号示例

1 代号 - 2 齿数 - 3 匹配同步带类型 - 4 dr
 STS5MD - 25 - S5M-15 - 6
 STH5MD - 25 - H5M-15 - 6

1 代号	2 齿数	3 匹配同步带类型	主要尺寸							轴承尺寸			材料规格有无			
			4 dr	Dr	Ds	Dfo	Dfi	A	W	Dh	轴承型号	D	B	Q	R	S
STS5MD STH5MD	16	S5M-15	6	25.46	24.5	29	19	17	22	14.5	606-2Z×2	17	6			
		27						32								
	18	S5M-15	8	28.65	27.69	32	22	17	22	16.5	69/8-2Z×2	19	6			
		27						32								
	20	S5M-15	8	31.83	30.87	35	24	17	22	16.5	69/8-2Z×2	19	6			
		27						32								
	22	S5M-15	8	35.01	34.05	39	27	17	22	19.5	608-2Z×2	22	7			
		27						32								
	24	S5M-15	8	38.2	37.24	42	30	17	22	19.5	608-2Z×2	22	7			
		27						32								
	25	S5M-10	6	39.79	38.83	43	32	11	16	13	69/6-2Z×2	15	5			
		S5M-15						17	22							
		S5M-25						27	32							
		S5M-10	8	39.79	38.83	43	32	11	16	16.5	69/8-2Z×2	19	6			
		S5M-15						17	22							
		S5M-25						27	32							
	26	S5M-15	10	41.38	40.42	45	33	17	22	25	6200-2Z×2	30	9			
		S5M-25						27	32							
	28	S5M-10	10	44.56	43.6	48	36	11	16	19.5	6900-2Z×2	22	6			
		S5M-15						17	22							
		S5M-25						27	32							
	30	S5M-15	12	47.75	46.79	51	39	17	22	25	6001-2Z×2	28	8			
		S5M-25						27	32							
	32	S5M-15	12	50.93	49.97	55	42	17	22	25	6001-2Z×2	28	8			
		S5M-25						27	32							
	36	S5M-15	15	57.3	56.34	61	49	17	22	29	6002-2Z×2	32	9			
		S5M-25						27	32							
	40	S5M-15	15	63.66	62.7	67	55	17	22	29	6002-2Z×2	32	9			
S5M-25		27						32								

- ▲ 轴承精度等级：0 级（压入前）
- ▲ 轴承采用压入方式
- ▲ STH5MD 型号匹配同步带类型为 H5M 系列。

同步带轮